



7 Available Sizes












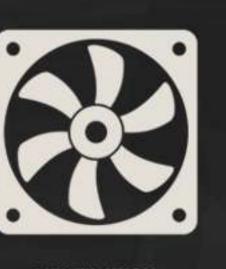















Phone **ECONOMIC & STANDARD VERSIONS AVAILABLE**

> Measurements Outer: W950 x D950 x H2200mm

> Inner: W820 x D820 x H2070mm

Number of Pax

Weight

Ventilation

 Air Circulation: 90m³/h Change of Air: Every 1 minute Number of Fans: 1 top + 1 bottom Fan Speed: 900 rpm

Lighting

2 x 5W LED light strip at 2 sides as ambience light

(motion sensor) 1 x 5W LED light strip in the middle as essential light (manual switch)

Motion Sensor

Motion activated ventilation fan and lighting, set at a default 5-minute delay before switching off automatically; adjustable delay timer with 2 other options of 45 seconds and 15 seconds

External Side Panels & Internal Walls Colour customisable external side panels and frames Colour customisable internal walls in acoustic PET fire retardant panels

Rear Glass

Economic option: 12mm tempered glass Standard option: 12mm laminated sound reducing tempered glass

Door

Economic option: Recessed frameless door of 10mm thickness in single glazed tempered glass, with frameless pivot hinge Standard option: Flushed frame door of 10mm thickness in laminated sound reducing tempered glass, with circular proprietary pivot hinge

Integrated Panel With Power Output 2 x universal electrical sockets 1 x USB Type-A and 1 x USB Type-C charging ports

Automatic Door Closer Excluded; Upgradeable. Brand: Honeywell

> Included Fixture (s) 1 x high table ledge



Solo

ECONOMIC & STANDARD VERSIONS AVAILABLE

Measurements

Outer: W1200 x D1200 x H2200mm Inner: W1070 x D1070 x H2070mm

Number of Pax

Weight 380kg

Ventilation

 Air Circulation: 90m³/h Change of Air: Every 2 minutes Number of Fans: 1 top + 1 bottom Fan Speed: 900 rpm

Lighting

 2 x 9W LED light strip at 2 sides as ambience light (motion sensor) 1 x 9W LED light strip in the middle as essential light (manual switch)

Motion Sensor

Motion activated ventilation fan and lighting, set at a default 5-minute delay before switching off automatically; adjustable delay timer with 2 other options of 45 seconds and 15 seconds

External Side Panels & Internal Walls

 Colour customisable external side panels and frames Colour customisable internal walls in acoustic PET fire retardant panels

Rear Glass

Economic option: 12mm tempered glass Standard option: 12mm laminated sound reducing tempered glass

Door

Economic option: Recessed frameless door of 10mm thickness in single glazed tempered glass, with frameless pivot hinge Standard option: Flushed frame door of

10mm thickness in laminated sound reducing tempered glass, with circular proprietary pivot hinge

Integrated Panel With Power Output 2 x universal electrical sockets 1 x USB Type-A and 1 x USB Type-C charging ports

> **Automatic Door Closer** Excluded; Upgradeable. Brand: Honeywell

> > Included Fixture (s) 1 x table ledge



Relax

STANDARD VERSION ONLY

Measurements

Outer: W1575 x D1200 x H2200mm Inner: W1445 x D1070 x H2070mm

Number of Pax

Weight 430kg

Ventilation Air Circulation: 180m³/h

 Change of Air: Every 1 minute Number of Fans: 2 top + 2 bottom Fan Speed: 900 rpm

Lighting

 2 x 9W LED light strip at 2 sides as ambience light (motion sensor) 1 x 9W LED light strip in the middle as essential light (manual switch)

Motion Sensor

Motion activated ventilation fan and lighting, set at a default 5-minute delay before switching off automatically; adjustable delay timer with 2 other options of 45 seconds and 15 seconds

External Side Panels & Internal Walls

 Colour customisable external side panels and frames Colour customisable internal walls in acoustic PET fire retardant panels

Rear Glass

Economic option: N/A Standard option: 12mm laminated sound reducing tempered glass

Door

Economic option: N/A

Standard option: Flushed frame door of 10mm thickness in laminated sound reducing tempered glass, with circular proprietary pivot hinge

Integrated Panel With Power Output • 2 x universal electrical sockets • 1 x USB Type-A and 1 x USB Type-C charging ports

> **Automatic Door Closer** Excluded; Upgradeable. Brand: Honeywell

> > Included Fixture (s)



Solo Plus STANDARD VERSION

Measurements

ONLY

Outer: W1750 x D1750 x H2200mm Inner: W1620 x D1620 x H2070mm

Number of Pax

Weight 470kg

 Air Circulation: 180m³/h Change of Air: Every 2 minutes Number of Fans: 2 top + 2 bottom Fan Speed: 900 rpm

Lighting

 2 x 13W LED light strip at 2 sides as ambience light (motion sensor) • 1 x 13W LED light strip in the middle as essential light (manual switch)

Motion Sensor

Motion activated ventilation fan and lighting, set at a default 5-minute delay before switching off automatically; adjustable delay timer with 2 other options of 45 seconds and 15 seconds

External Side Panels & Internal Walls Colour customisable external side panels and frames Colour customisable internal walls in acoustic

Rear Glass

PET fire retardant panels

Economic option: N/A Standard option: 12mm laminated sound reducing tempered glass

Door

Economic option: N/A Standard option: Flushed frame door of 10mm thickness in laminated sound reducing tempered glass, with circular proprietary pivot hinge

Integrated Panel With Power Output 2 x universal electrical sockets 1 x USB Type-A and 1 x USB Type-C charging ports

> **Automatic Door Closer** Excluded; Upgradeable. Brand: Honeywell

> > Included Fixture (s)



ECONOMIC & STANDARD **VERSIONS AVAILABLE**

Cowork

Measurements

Outer: W1750 x D1200 x H2200mm Inner: W1620 x D1070 x H2070mm

Number of Pax

Weight

Ventilation

• Air Circulation: 180m³/h Change of Air: Every 2 minutes Number of Fans: 2 top + 2 bottom Fan Speed: 900 rpm

Lighting

 2 x 9W LED light strip at 2 sides as ambience light (motion sensor) 1 x 9W LED light strip in the middle as essential light (manual switch)

Motion Sensor

Motion activated ventilation fan and lighting, set at a default 5-minute delay before switching off automatically; adjustable delay timer with 2 other options of 45 seconds and 15 seconds

External Side Panels & Internal Walls

 Colour customisable external side panels and frames Colour customisable internal walls in acoustic PET fire retardant panels

Rear Glass

Economic option: 12mm tempered glass Standard option: 12mm laminated sound reducing tempered glass


Door

Economic option: Recessed frameless door of 10mm thickness in single glazed tempered glass, with frameless pivot hinge Standard option: Flushed frame door of 10mm thickness in laminated sound reducing tempered glass, with circular proprietary pivot hinge

Integrated Panel With Power Output 2 x universal electrical sockets 1 x USB Type-A and 1 x USB Type-C charging ports

> **Automatic Door Closer** Included. Brand: Honeywell

Included Fixture (s) 1 x high table ledge with centre pole

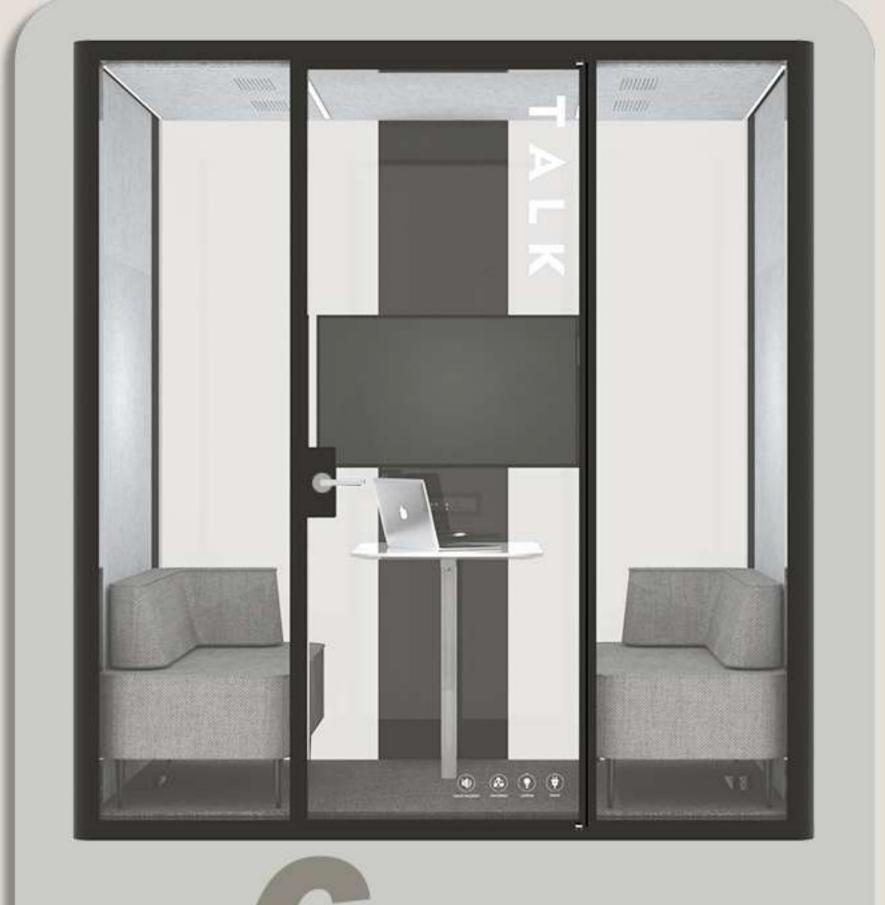

Talk **ECONOMIC & STANDARD**

Measurements

Outer: W2200 x D1200 x H2200mm Inner: W2070 x D1070 x H2070mm

VERSIONS AVAILABLE

Number of Pax 2-4

Weight

Ventilation

 Air Circulation: 180m³/h Change of Air: Every 2 minutes Number of Fans: 2 top + 2 bottom • Fan Speed: 900 rpm

Lighting

• 2 x 9W LED light strip at 2 sides as ambience light (motion sensor) • 2 x 9W LED light strip in the middle as essential light (manual switch)

Motion Sensor

Motion activated ventilation fan and lighting, set at a default 5-minute delay before switching off automatically; adjustable delay timer with 2 other options of 45 seconds and 15 seconds

External Side Panels & Internal Walls Colour customisable external side panels and frames Colour customisable internal walls in acoustic

Rear Glass Economic option: 12mm tempered glass Standard option: 12mm laminated sound reducing tempered glass

PET fire retardant panels


Door

Economic option: Recessed frameless door of 10mm thickness in single glazed tempered glass, with frameless pivot hinge Standard option: Flushed frame door of 10mm thickness in laminated sound reducing tempered glass, with circular proprietary pivot hinge

Integrated Panel With Power Output 2 x universal electrical sockets 1 x USB Type-A and 1 x USB Type-C charging ports

> **Automatic Door Closer** Included. Brand: Honeywell

Included Fixture (s) 1 x table 1 x screen mountable wall panel

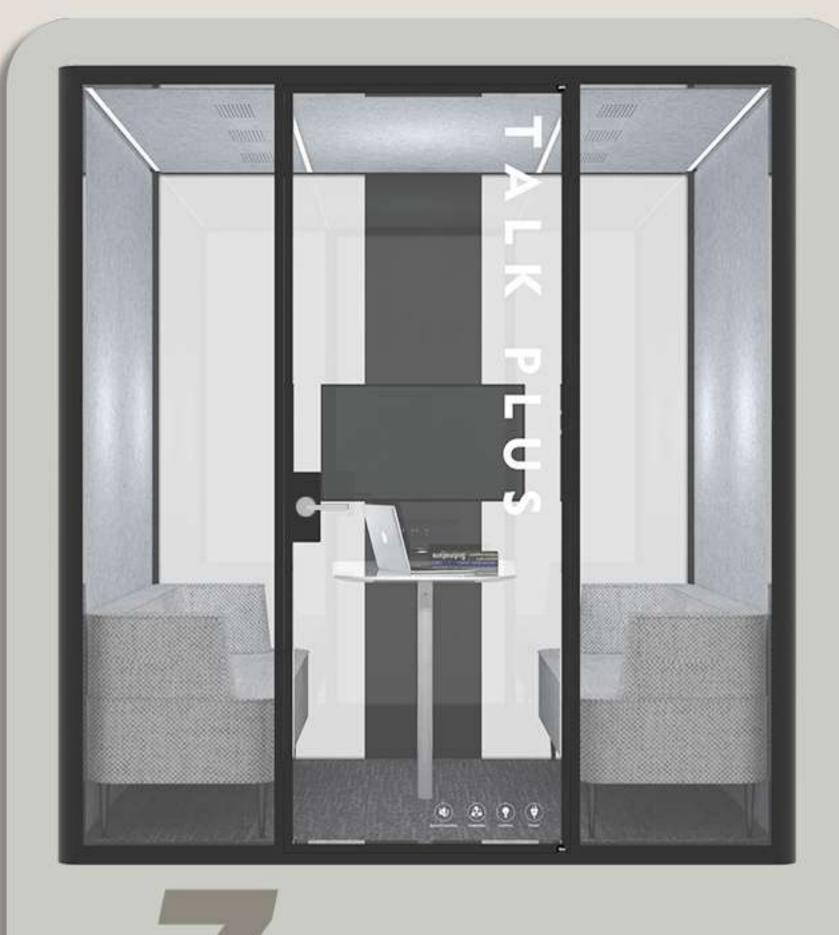

Talk Plus **ECONOMIC & STANDARD**

Measurements

Outer: W2200 x D1750 x H2200mm Inner: W2070 x D1620 x H2070mm

VERSIONS AVAILABLE

Number of Pax

Weight

 Air Circulation: 360m³/h Change of Air: Every 1 minute Number of Fans: 4 top + 4 bottom Fan Speed: 900 rpm

Lighting 2 x 9W LED light strip at 2 sides as ambience light (motion sensor) 2 x 9W LED light strip in the middle as essential light

(manual switch)

Motion Sensor Motion activated ventilation fan and lighting, set at a default 5-minute delay before switching off automatically; adjustable delay timer with 2 other options of 45 seconds and 15 seconds

External Side Panels & Internal Walls Colour customisable external side panels and frames

Colour customisable internal walls in acoustic

PET fire retardant panels

Rear Glass

Economic option: 12mm tempered glass Standard option: 12mm laminated sound reducing tempered glass

Door

Economic option: Recessed frameless door of 10mm thickness in single glazed tempered glass, with frameless pivot hinge Standard option: Flushed frame door of 10mm thickness in laminated sound reducing tempered glass, with circular proprietary pivot hinge

Integrated Panel With Power Output 2 x universal electrical sockets 1 x USB Type-A and 1 x USB Type-C charging ports

> **Automatic Door Closer** Included. Brand: Honeywell

Included Fixture (s) 1 x table 1 x screen mountable wall panel